

General Description

The CSV12N50TF is the highest performance N-ch MOSFETs with specialized high voltage technology, which provide excellent RDSON and gate charge for most of the SPS, Charger ,Adapter and lighting applications .

The CSV12N50TF meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Features

- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	500	V
V_{GS}	Gate-Source Voltage	±30	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	12	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	7	A
I_{DM}	Pulsed Drain Current ²	36	A
EAS	Single Pulse Avalanche Energy ³	190	mJ
I_{AS}	Avalanche Current	11.5	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation ⁴	41.7	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient (Steady State) ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	3	°C/W

Product Summary













BVDSS	RDSON	ID
500V	0.52Ω	12A

Applications

- High efficient switched mode power supplies
- Electronic lamp ballast
- LCD TV/ Monitor
- Adapter

TO220F Pin Configuration

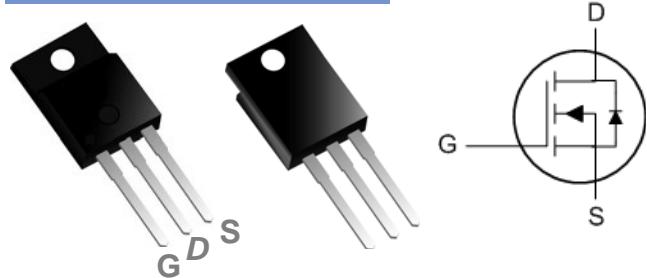

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	500	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.5	---	$\text{V}/^\circ\text{C}$
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{GS}=10\text{V}$, $I_D=4.5\text{A}$	---	0.43	0.52	Ω
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu\text{A}$	2	---	5	V
$\Delta V_{GS(\text{th})}$	$V_{GS(\text{th})}$ Temperature Coefficient		---	-7.7	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=400\text{V}$, $V_{GS}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	2	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 30\text{V}$, $V_{DS}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=5\text{V}$, $I_D=4.5\text{A}$	---	5.5	---	S
R_g	Gate Resistance	$V_{DS}=0\text{V}$, $V_{GS}=0\text{V}$, $f=1\text{MHz}$	---	3.2	6.4	Ω
Q_g	Total Gate Charge (10V)	$V_{DS}=400\text{V}$, $V_{GS}=10\text{V}$, $I_D=1\text{A}$	---	43.7	61	nC
Q_{gs}	Gate-Source Charge		---	11.8	16.5	
Q_{gd}	Gate-Drain Charge		---	12.8	17.9	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=250\text{V}$, $V_{GS}=10\text{V}$, $R_G=10\Omega$, $I_D=1\text{A}$	---	23	46	ns
T_r	Rise Time		---	19	34	
$T_{d(off)}$	Turn-Off Delay Time		---	74	148	
T_f	Fall Time		---	46	92	
C_{iss}	Input Capacitance	$V_{DS}=25\text{V}$, $V_{GS}=0\text{V}$, $F=1\text{MHz}$	---	2375	3325	pF
C_{oss}	Output Capacitance		---	150	210	
C_{rss}	Reverse Transfer Capacitance		---	5.5	7.7	

Guaranteed Avalanche Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy ⁵	$V_{DD}=50\text{V}$, $L=1\text{mH}$, $I_{AS}=4\text{A}$	23	---	---	mJ

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,6}	$V_G=V_D=0\text{V}$, Force Current	---	---	12	A
I_{SM}	Pulsed Source Current ^{2,6}		---	---	36	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0\text{V}$, $I_S=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V
t_{rr}	Reverse Recovery Time	$I_F=1\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	---	165	---	nS
Q_{rr}	Reverse Recovery Charge		---	710	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{DD}=50\text{V}$, $V_{GS}=10\text{V}$, $L=1\text{mH}$, $I_{AS}=11.5\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The Min. value is 100% EAS tested guarantee.
- 6.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

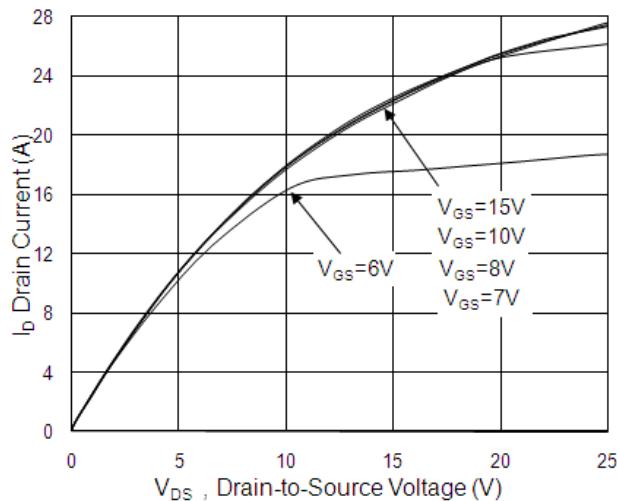


Fig.1 Typical Output Characteristics

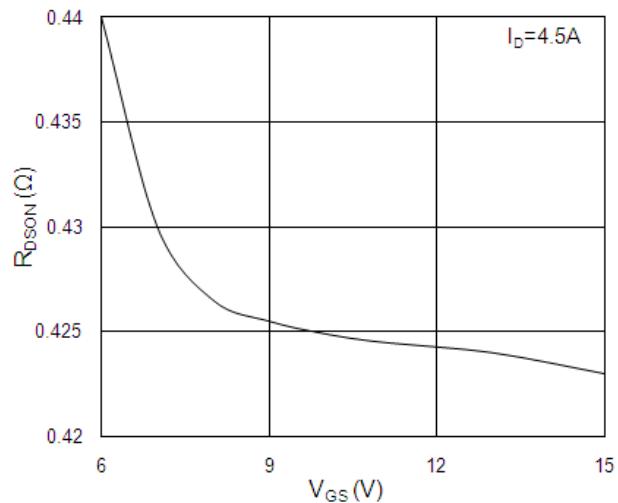


Fig.2 On-Resistance vs. G-S Voltage

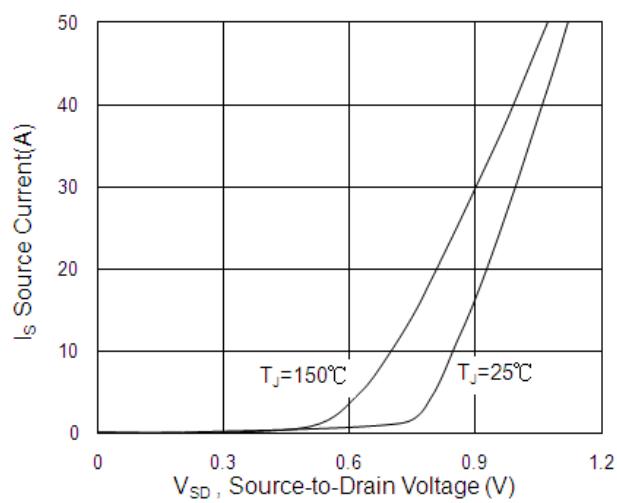


Fig.3 Forward Characteristics of Reverse

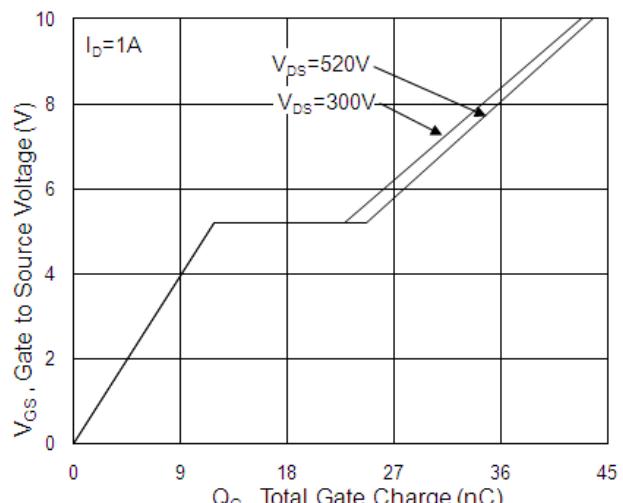


Fig.4 Gate-Charge Characteristics

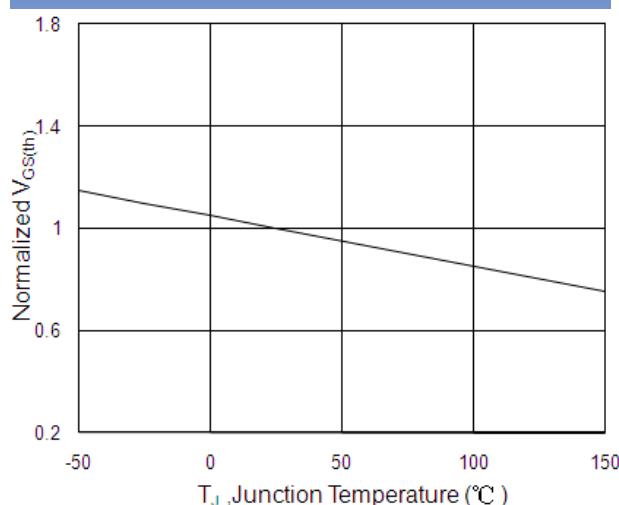


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

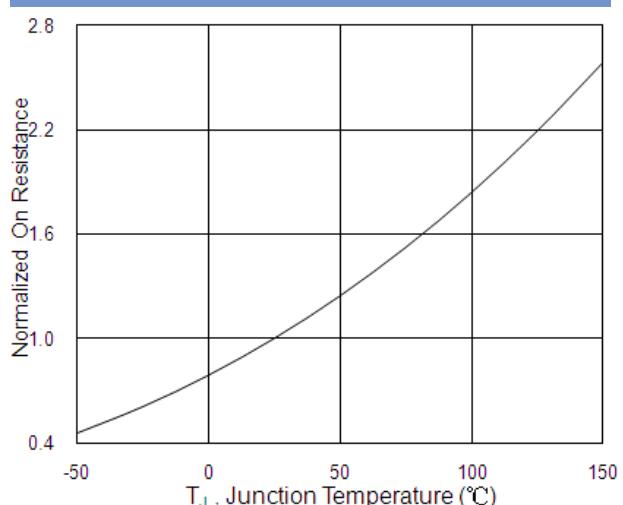


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

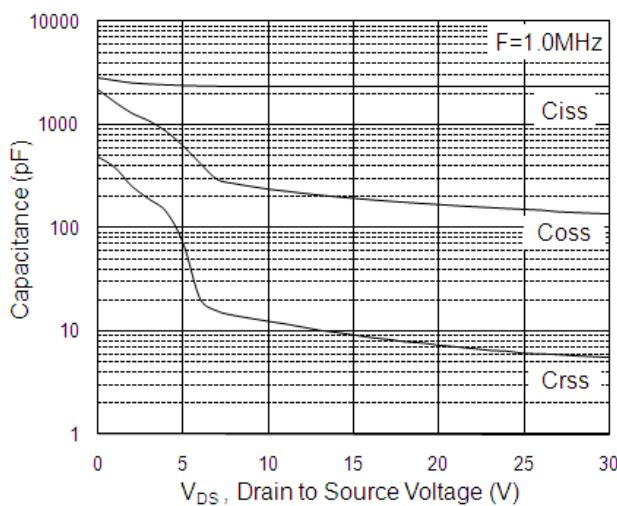


Fig.7 Capacitance

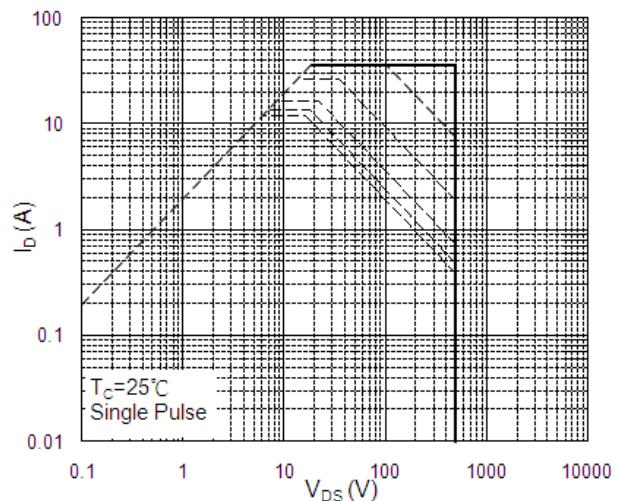


Fig.8 Safe Operating Area

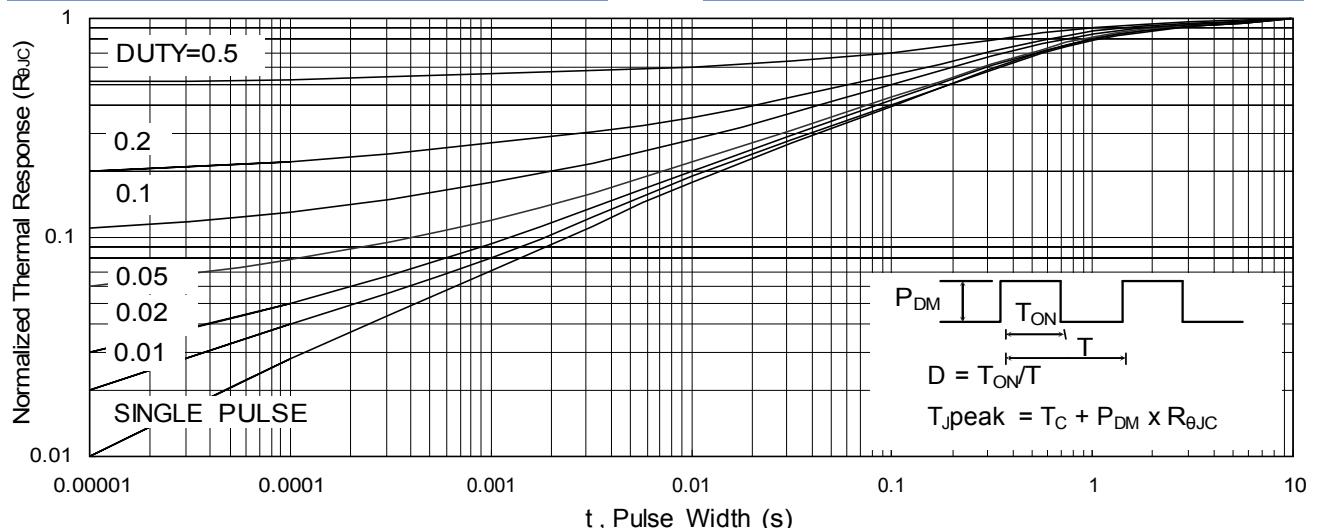


Fig.9 Normalized Maximum Transient Thermal Impedance

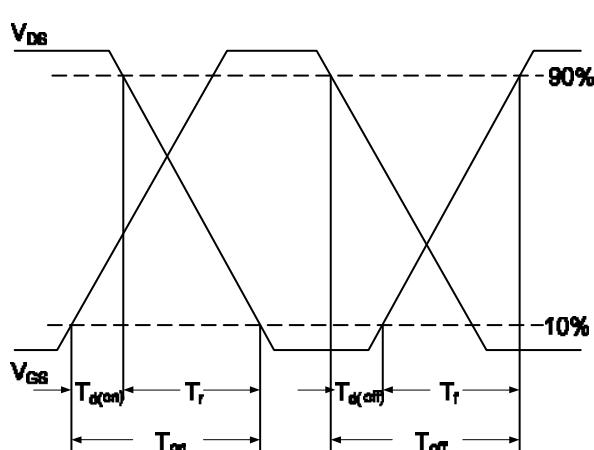


Fig.10 Switching Time Waveform

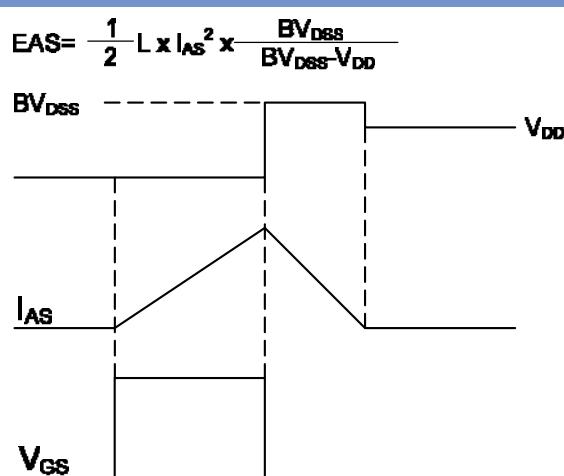


Fig.11 Unclamped Inductive Switching Waveform